


MINIMASTER

**Adjustable automatic lubrication for bearings, chains and sprockets.
Purpose designed for agricultural - industrial machinery.**

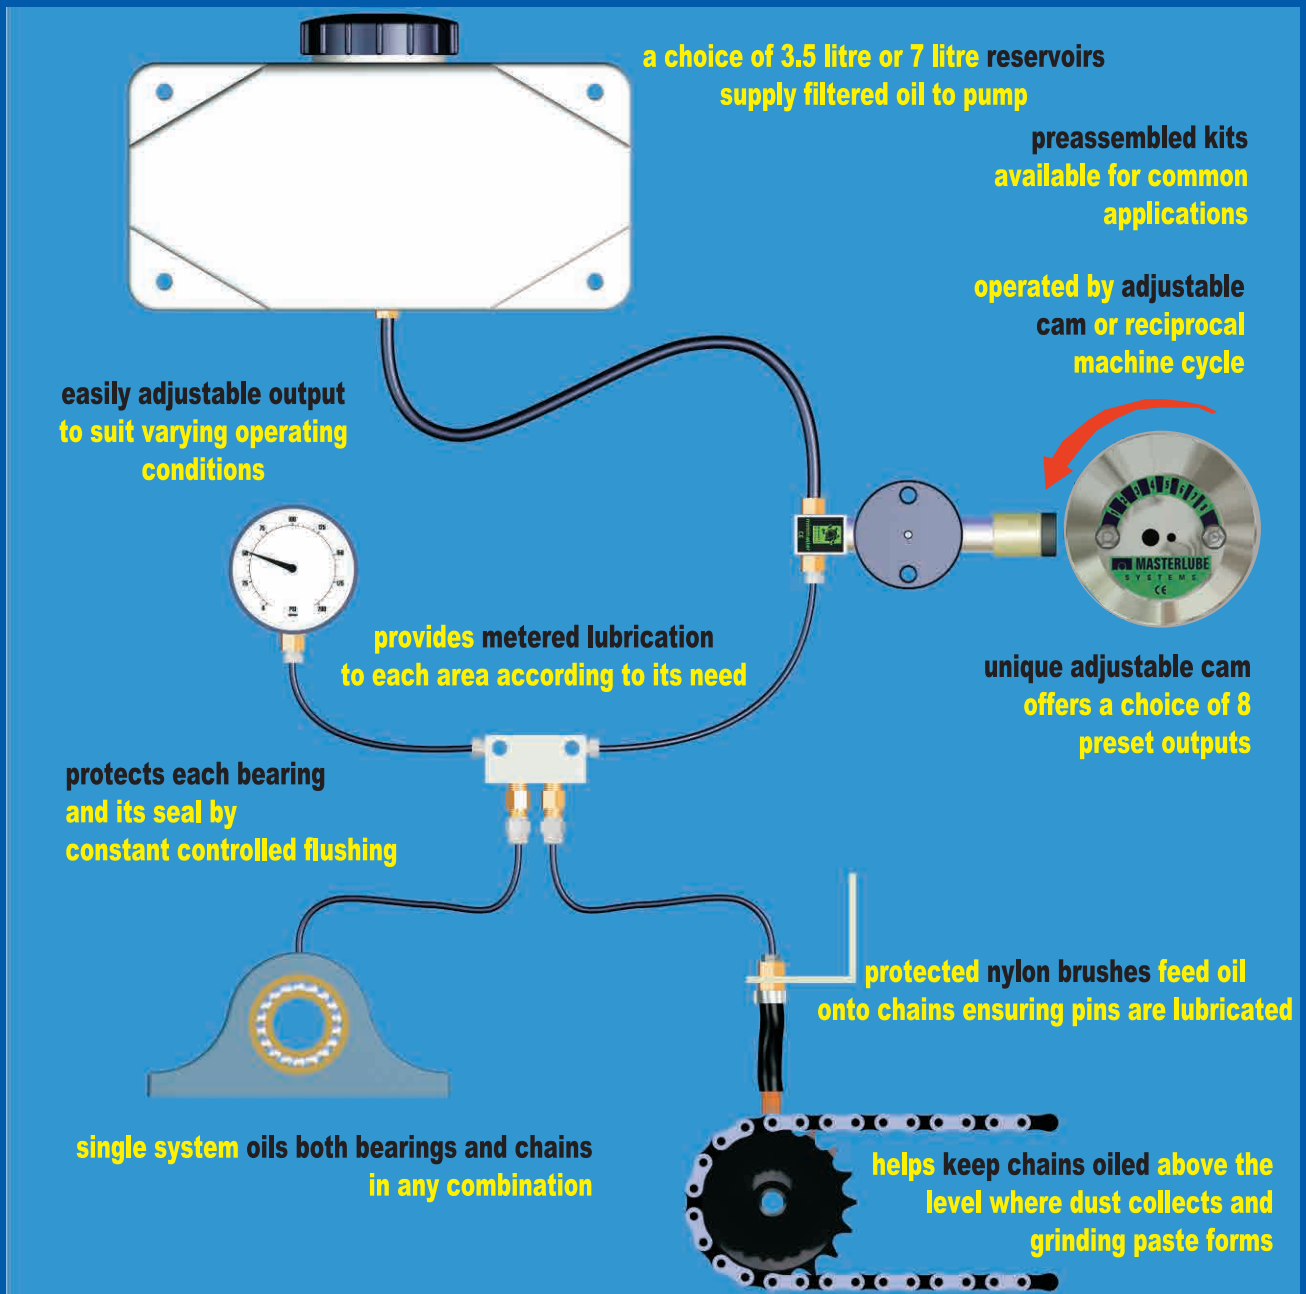

Constant oil lubrication is safer, reduces machine downtime & can considerably extend component life.


Trilube
Lubricating Solutions
PH:(02) 9820 5400

Website: www.trilube.com.au
Email: sales@trilube.com.au
Fax: (02) 9820 5411
Unit 1/17 Pembury Rd Minto NSW 2566

minimaster

Meter units incorporate a non return valve and are available with a choice of 8 flow rates to allow a wide variety of lubricant requirements to be fed by a single system. Frame mounted blocks interrupt the primary line to allow meter units to be mounted close to the lubrication points.

Overall output adjustable by changing the frequency of the pump stroke (speed of reciprocating operating source or cam drive) or by altering the travel of the piston (setting of adjustable cam drive or changing distance of pump from reciprocating operating source).

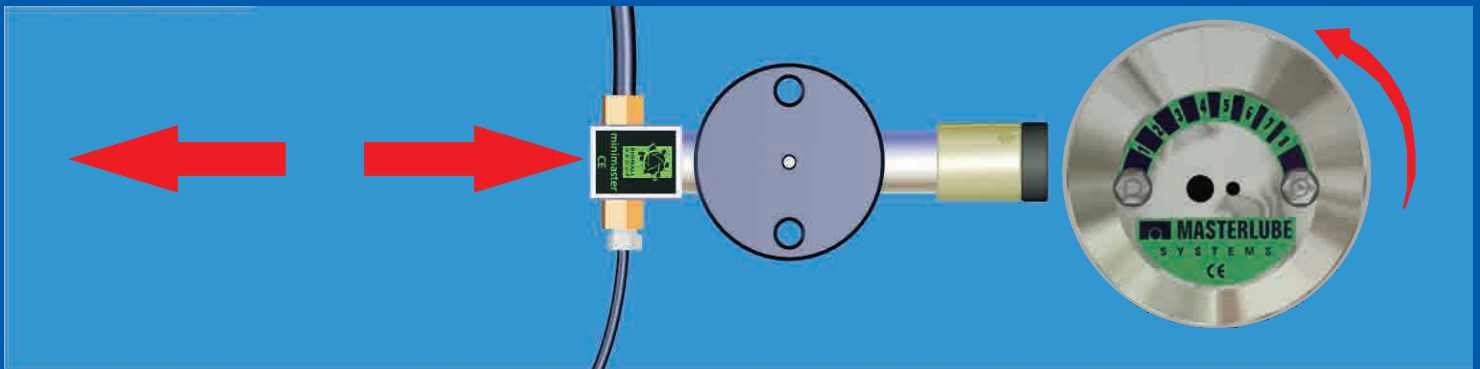

application

- **ideal for round baler chain lubrication.**
- **industrial, food processing and agricultural machinery.**
- **all applications where reliable oil lubrication is needed.**

oil:	standard engine oil (SAE30) all oils to API/CC & API/CD specifications.
output pressure:	up to 250 psi.
max output:	2cc per stroke max (PMM2C/CD) or 6cc per stroke (PMXC)
temperature:	+40 -15C
pump mounting:	6mm x 2 /8mm x 2
reservoir capacity:	3.5 or 7 litres.
secondary lines:	4mm diameter nylon.
reservoir feed:	8mm neoprene.
lube brushes:	5/16 unf female inlet port.