


CHAINMASTER

simple fully adjustable oil lubrication for bearings and chains

Electrically operated 12V fully adjustable oil pump protects critical moving parts by feeding oil constantly to bearings, sprockets and chains.

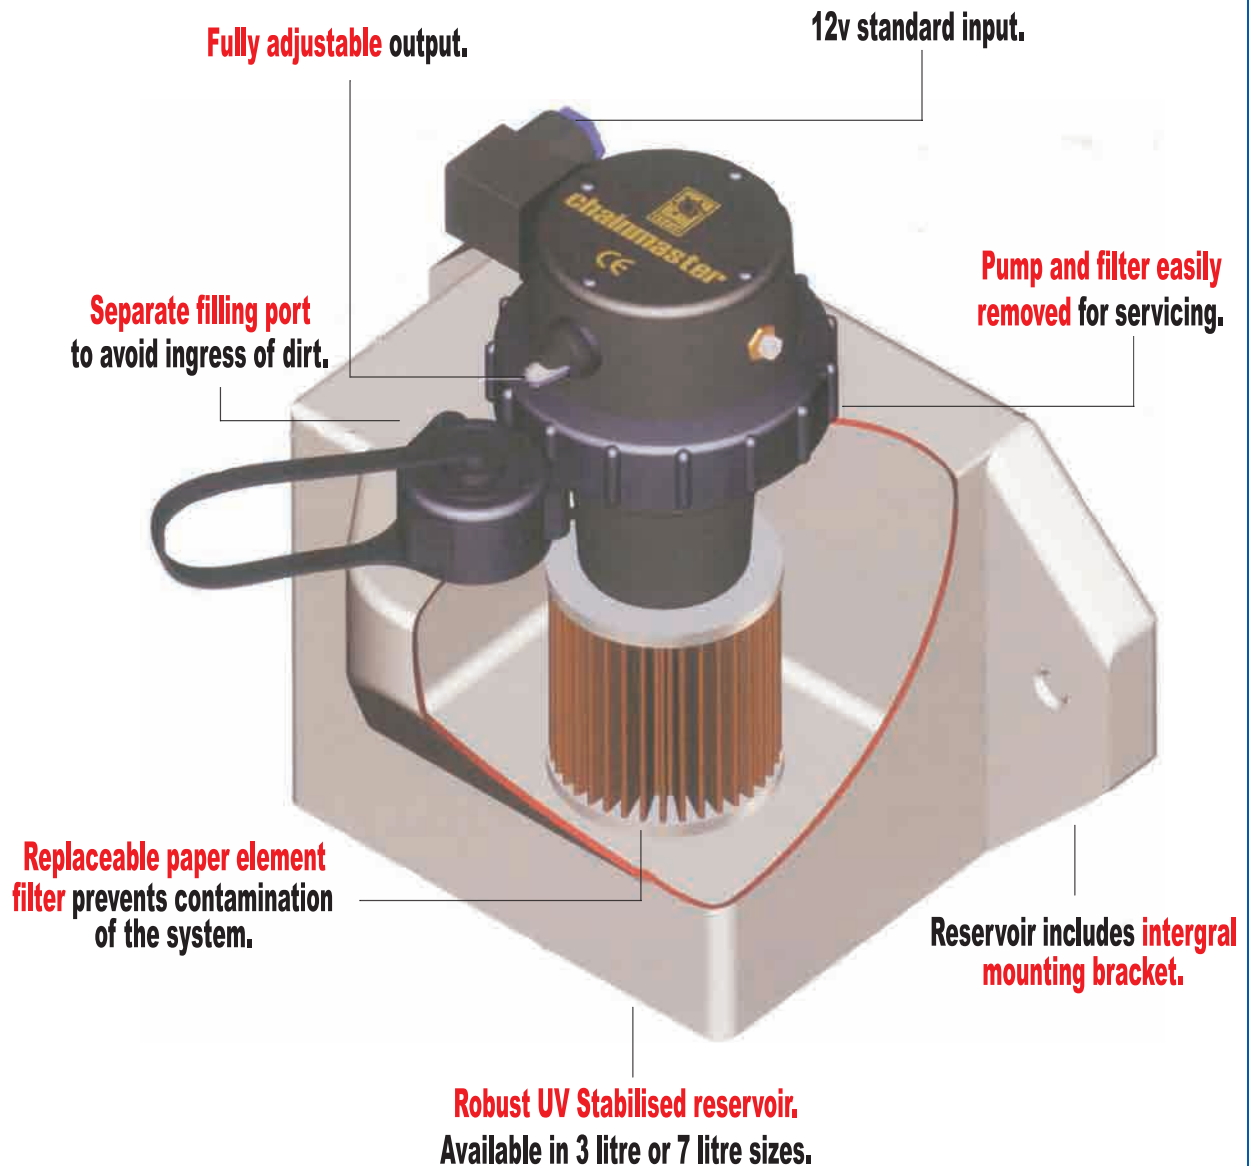

Constant oil lubrication is safer, reduces machine downtime & can considerably extend component life.

Trilube
Lubricating Solutions
PH:(02) 9820 5400


Website: www.trilube.com.au
Email: sales@trilube.com.au
Fax: (02) 9820 5411
Unit 1/17 Pembury Rd Minto NSW 2566

Protecting heavily worked machinery in tough environments

Issue: August 2008

system principal

- Each meter unit incorporates a non return valve and is available in a choice of 8 flow rates to allow a wide variety of lubricant requirements to be fed by a simple system.
- Frame mounted manifold blocks interrupt the primary line to allow meter units to be mounted close to lubrication points.
- Overall output adjustable easily at the pump to allow for changing operating conditions.

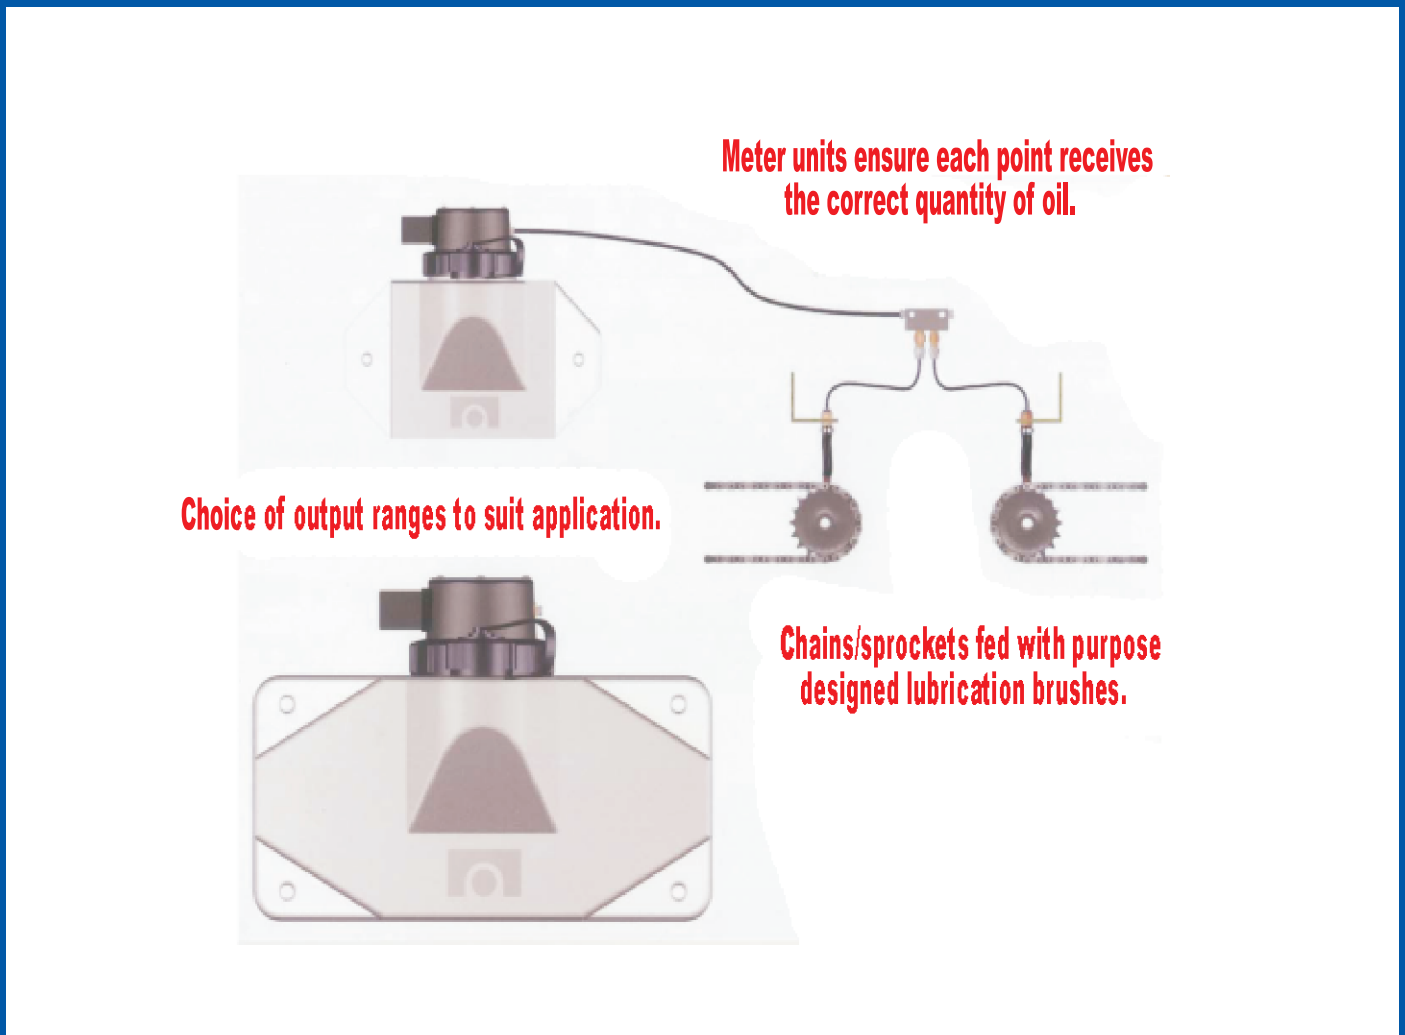

No special oils required. Uses all basic engine oils (SAE30) to API/CC or API/CD specifications.

model: NCMX
output volume: adjustable from 7cc/minute to 15cc/minute
voltage: 12vdc or 24vdc on request
filter: nominal 50 micron paper element
mounting: M8 x 2 (3L) M8 x 4 (7L)